




PROJECT NAME	
CATALOG NUMBER	
NOTES	
FIXTURE SCHEDULE	

FLAT PANELS WITH FIELD-ADJUSTABLE OUTPUT & CCT



Field adjustable light output and CCT!

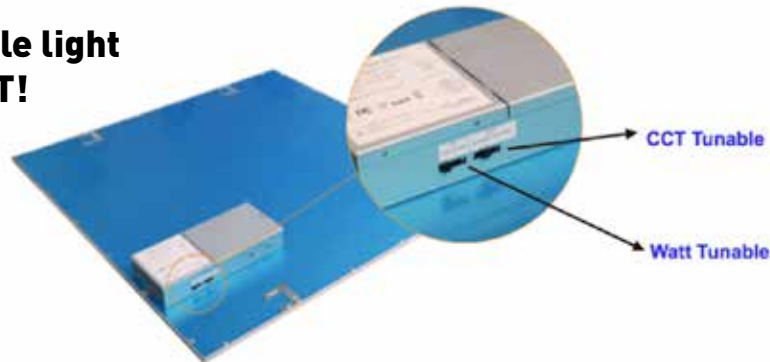

FEATURES & BENEFITS

- Single panel offers multiple wattages and color options - simplify inventory management
- Thin profile, edge lit for uniform and consistent illumination
- Lightweight and energy-saving over traditional troffer
- DLC listed; Utility Rebate savings
- Select models DLC Premium
- Quick & Easy Install at job sites
- Simple quick-connects for fast wiring
- Box allows for daisy chain
- Consistency: Anti-yellowing diffuser
- No visible flicker
- Dimmable; 0-10V wiring
- Durable and strong housing; no sharp edges
- T-grid (hurricane) clips attached
- Certifications: cULus, FCC & IC-rated housing
- High Efficacy – up to 140 lumens/watt
- 100-277VAC
- 50,000 hour life [L70]
- 5 year warranty; 10 year warranty for Education applications

APPLICATIONS

- Commercial
- Education
- Healthcare
- Hospitality
- Office
- Transportation

FLAT PANELS WITH FIELD-ADJUSTABLE OUTPUT & CCT

ORDERING INFORMATION

Model Number	Size	Lumen Output	Power (W)	CCT (K)	Efficiency (lm/W)	Beam Angle	Dimmable	Input Voltage	CRI	Equivalent Watts	DLC Certification	Case Pack	Weight
PLC14W45ADMU02-S	1 x 4	4700	45 40 35 30	3000K, 3500K, 4000K, 5000K	104 LPW	120°	Yes	120V - 277V	80	104	DLC Standard	2	8.4 lbs
PLC22W45ADMU02-S	2 x 2	4700	45 40 35 30	3000K, 3500K, 4000K, 5000K	104 LPW	120°	Yes	120V - 277V	80	104	DLC Standard	2	7.3 lbs
PLC24W50ADMU02-S	2 x 4	5200	50 45 40 35	3000K, 3500K, 4000K, 5000K	104 LPW	120°	Yes	120V - 277V	80	104	DLC Standard	2	13.9 lbs
PLC24W72ADMU02-S	2 x 4	7500	72 65 60 55	3000K, 3500K, 4000K, 5000K	104 LPW	120°	Yes	120V - 277V	80	104	DLC Standard	2	13.9 lbs

TECHNICAL SPECIFICATION

- Input voltage: 100 - 277 VAC, 50 - 60 Hz
- THD: ≤ 15%
- PF: >0.9 with no flicker
- Power Efficiency: >90%
- Color Temperatures: 3000K, 3500K, 4000K, 5000K
- Color Rendering Index: CRI >80
- Beam Angle: 120°
- Material: AL Frame+PMMA LGP+PS diffuser
- Operating Temperature: -4°F to +122°F (-42° C to +50° C)
- IP Rating: IP44
- Rated Life: 50,000 Hours

