




PROJECT NAME	
CATALOG NUMBER	
NOTES	
FIXTURE SCHEDULE	

## FLAT PANELS (SINGLE OUTPUT & CCT)



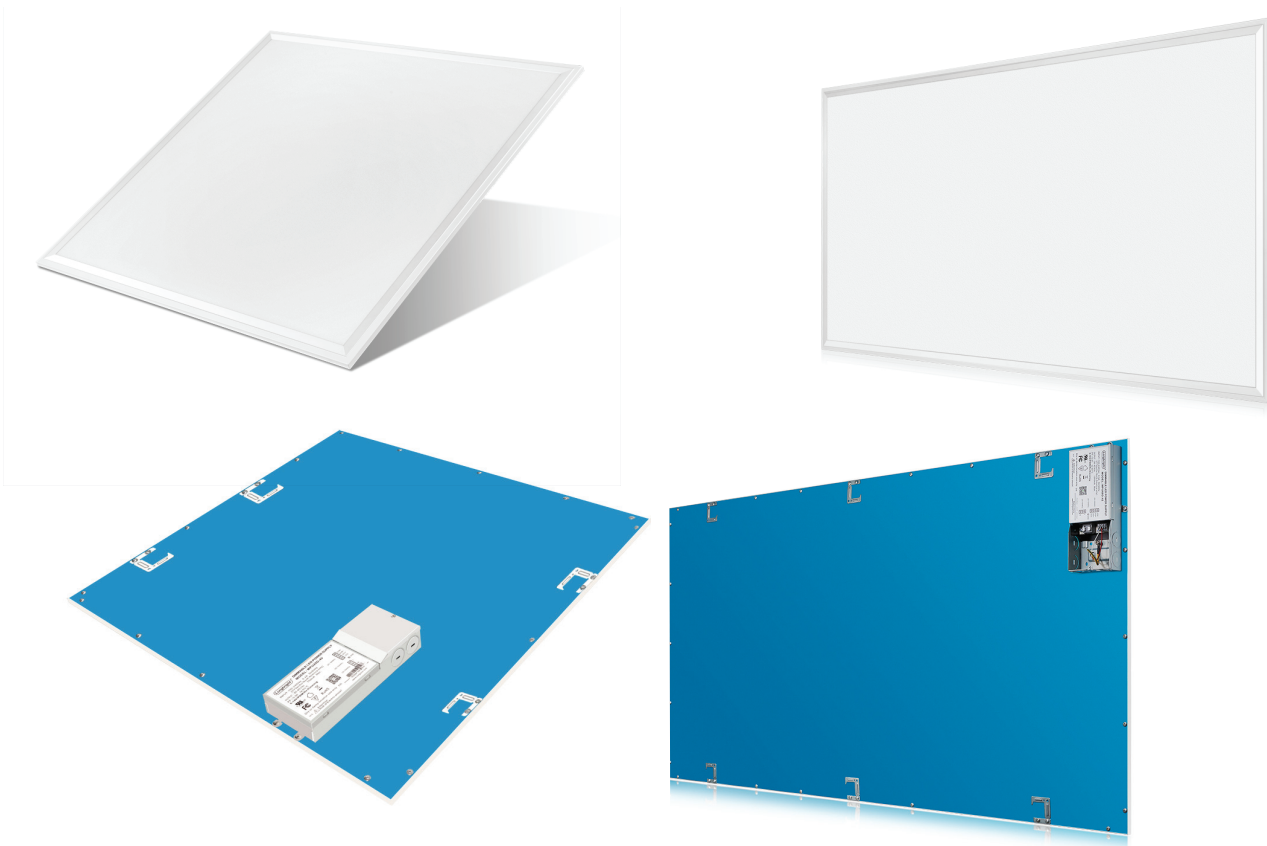



**DIMMABLE**



**NO FLICKER**



**IC-RATED**



**80% Energy Saving**



**5 years Warranty**

### FEATURES & BENEFITS

- Thin profile, edge lit for uniform and consistent illumination
- Lightweight and energy-saving over traditional troffer
- DLC listed; Utility Rebate savings
- Select models DLC Premium
- Quick & Easy Install at job sites
- Simple quick-connects for fast wiring
- Box allows for daisy chain
- Consistency: Anti-yellowing diffuser
- No visible flicker

- Dimmable; 0-10V wiring
- Durable and strong housing; no sharp edges
- T-grid (hurricane) clips attached
- Certifications: cULus, FCC & IC-rated housing
- High Efficacy – up to 140 lumens/watt
- 100-277VAC
- 50,000 hour life [L70]
- 5 year warranty; 10 year warranty for Education applications

### APPLICATIONS

- Commercial
- Education
- Healthcare
- Hospitality
- Office
- Transportation

## FLAT PANELS (SINGLE OUTPUT & CCT)

### ORDERING INFORMATION

Model Number	Size	Lumen Output	Power (W)	CCT (K)	Efficiency (lm/W)	Beam Angle	Dimmable	Input Voltage	CRI	Equivalent Watts	DLC Certification	Case Pack	Weight
PL14W40AC30DW07-S	1 x 4	4100	40	3000	103	120°	Yes	100V - 277V	80	64W	DLC Standard	2	6.8 lbs
PL14W40AC40DW07-S	1 x 4	4400	40	4000	110	120°	Yes	100V - 277V	80	64W	DLC Standard	2	6.8 lbs
PL14W40AC50DW07-S	1 x 4	4600	40	5000	115	120°	Yes	100V - 277V	80	64W	DLC Standard	2	6.8 lbs
PL14W45AC30DW01-S	1 x 4	5000	45	3000	111	120°	Yes	100V - 277V	80	80W	DLC Standard	2	6.8 lbs
PL14W45AC40DW01-S	1 x 4	5300	45	4000	118	120°	Yes	100V - 277V	80	80W	DLC Standard	2	6.8 lbs
PL14W45AC50DW01-S	1 x 4	5600	45	5000	124	120°	Yes	100V - 277V	80	80W	DLC Standard	2	6.8 lbs
PL22W36AC30DW01-S	2 x 2	3900	36	3000	108	120°	Yes	100V - 277V	80	56W	DLC Standard	2	6.6 lbs
PL22W36AC40DW01-S	2 x 2	4200	36	4000	117	120°	Yes	100V - 277V	80	56W	DLC Standard	2	6.6 lbs
PL22W36AC50DW01-S	2 x 2	4400	36	5000	122	120°	Yes	100V - 277V	80	56W	DLC Standard	2	6.6 lbs
PL22W40AC30DW07-S	2 x 2	4300	40	3000	108	120°	Yes	100V - 277V	80	64W	DLC Standard	2	6.6 lbs
PL22W40AC40DW07-S	2 x 2	4500	40	4000	113	120°	Yes	100V - 277V	80	64W	DLC Standard	2	6.6 lbs
PL22W40AC50DW07-S	2 x 2	4700	40	5000	118	120°	Yes	100V - 277V	80	64W	DLC Standard	2	6.6 lbs
PL22W45AC30DW01-S	2 x 2	5000	45	3000	111	120°	Yes	100V - 277V	80	80W	DLC Standard	2	6.6 lbs
PL22W45AC40DW01-S	2 x 2	5300	45	4000	118	120°	Yes	100V - 277V	80	80W	DLC Standard	2	6.6 lbs
PL22W45AC50DW01-S	2 x 2	5500	45	5000	122	120°	Yes	100V - 277V	80	80W	DLC Standard	2	6.6 lbs
PL24W50AC30DW05-S	2 x 4	5400	50	3000	108	120°	Yes	100V - 277V	80	84W	DLC Standard	2	13.4 lbs
PL24W50AC40DW05-S	2 x 4	5700	50	4000	114	120°	Yes	100V - 277V	80	84W	DLC Standard	2	13.4 lbs
PL24W50AC50DW05-S	2 x 4	6000	50	5000	120	120°	Yes	100V - 277V	80	84W	DLC Standard	2	13.4 lbs
PL24W60AC30DW05-S	2 x 4	6300	60	3000	105	120°	Yes	100V - 277V	80	96W	DLC Standard	2	13.4 lbs
PL24W60AC40DW05-S	2 x 4	6700	60	4000	112	120°	Yes	100V - 277V	80	96W	DLC Standard	2	13.4 lbs
PL24W60AC50DW05-S	2 x 4	7000	60	5000	117	120°	Yes	100V - 277V	80	96W	DLC Standard	2	13.4 lbs
PL24W72AC30DW05-S	2 x 4	9000	72	3000	125	120°	Yes	100V - 277V	80	128W	DLC Standard	2	13.4 lbs
PL24W72AC40DW05-S	2 x 4	9400	72	4000	131	120°	Yes	100V - 277V	80	128W	DLC Standard	2	13.4 lbs
PL24W72AC50DW05-S	2 x 4	9900	72	5000	138	120°	Yes	100V - 277V	80	128W	DLC Standard	2	13.4 lbs

**TECHNICAL SPECIFICATION**

- Input voltage: 100 - 277 VAC, 50 - 60 Hz
- THD: ≤ 15%
- PF: >0.9 with no flicker
- Power Efficiency: >90%
- Color Temperatures: 3000K, 4000K, 5000K
- Color Rendering Index: CRI >80
- Beam Angle: 120°
- Material: AL Frame+PMMA LGP+PS diffuser
- Operating Temperature: -4°F to +122°F (-42° C to +50° C)
- IP Rating: IP44
- Rated Life: 50,000 Hours

